

SAP DESCRIPTION:

MTL SNG 480612 H

SKU No.

Maximum Flow Rate: 2244 GPM

Recommended Flow Rate: 1848 GPM


Inlet Pressure: 115 PSI

Sheet Size:

A4


Scale:

1:40

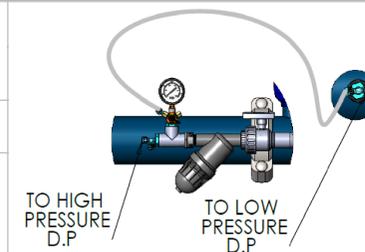

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NETAFIM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NETAFIM IS PROHIBITED

|             |       |            |
|-------------|-------|------------|
| Designed By |       |            |
| Drawn By    | KEREM | 16/01/2020 |
| Checked By  |       |            |
| QA          |       |            |
| Sheet: 1    | Of: 3 | Rev. -     |

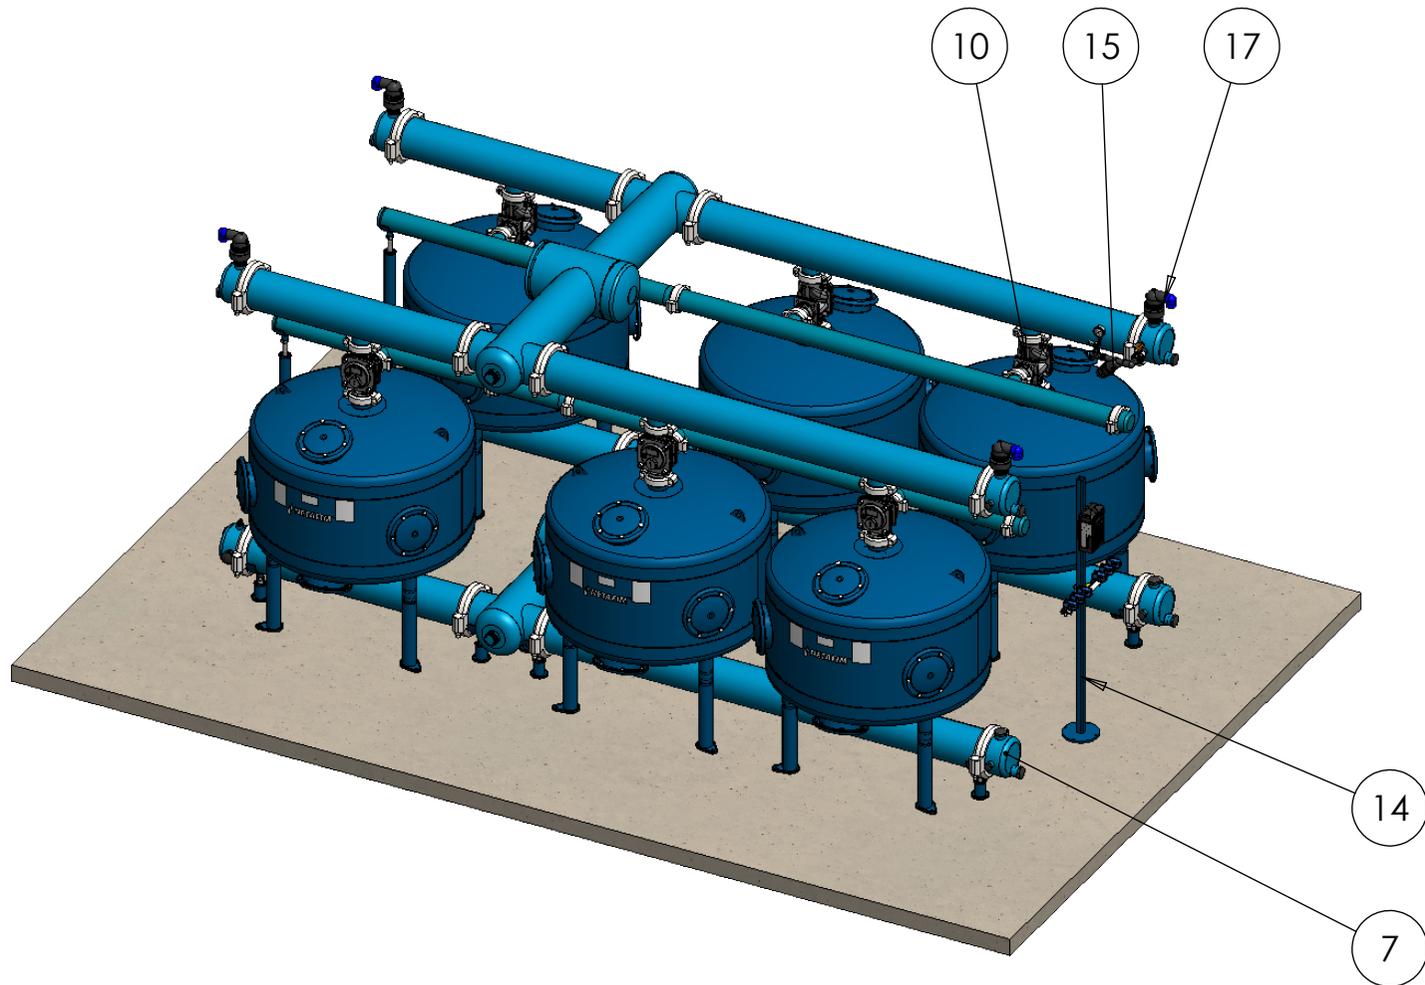

SAP DESCRIPTION:

MTL SNG 480612 H

SKU No.


Maximum Flow Rate: 2244 GPM

Recommended Flow Rate: 1848 GPM

Inlet Pressure: 115 PSI

Sheet Size:  
A4


Scale:  
1:40

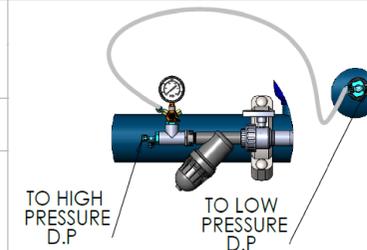

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NETAFIM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NETAFIM IS PROHIBITED

|             |       |            |
|-------------|-------|------------|
| Designed By |       |            |
| Drawn By    | KEREM | 16/01/2020 |
| Checked By  |       |            |
| QA          |       |            |
| Sheet: 2    | Of: 3 | Rev. -     |

| ITEM NO. | SAP Description                               | SAP Cat. No. | QTY. |
|----------|---|--------------|------|
| 1        | METAL SNG.CHA.PLUS 48"*4" VIC PN08 LONG       | 71910-001626 | 6    |
| 2        | METAL MAN H 12"VIC IN 4x8"VIC OUT+2"NPT       | 71910-002232 | 2    |
| 3        | METAL MAN 8"*2 OUT*4" VIC F/48" TANK          | 71910-001713 | 4    |
| 4        | METAL MAN 8"*1 OUT*4" VIC F/48" TANK          | 71910-001704 | 4    |
| 5        | METAL BF MAN 4"*2 OUT*3" VIC F/48" TANK       | 71910-001712 | 2    |
| 6        | METAL BF MAN 4"*1 OUT*3" VIC F/48" TANK       | 71910-001703 | 2    |
| 7        | MET CUP 8"VIC W/2 OUT 2"NPT +1 OUT 1"NPT      | 71910-001804 | 8    |
| 8        | METAL CUP 4" VIC                              | 71910-001792 | 2    |
| 9        | METAL NIPPLE VIC/VIC 4"*460MM                 | 71910-009010 | 2    |
| 10       | NET METAL B.F VALVE 4X3 STRAIGHT VIC          | 71600-006660 | 6    |
| 11       | VICTAULIC COUPLING 3" ONE BOLT                | 71910-002501 | 6    |
| 12       | VICTAULIC COUPLING 4" ONE BOLT                | 71910-002502 | 24   |
| 13       | VICTAULIC COUPLING 8" TWO BOLT                | 71910-002504 | 16   |
| 14       | Control stand + controller + Aquative bracket |              | 1    |
| 15       | 1" CONTROL KIT FOR MEDIA FILTER - NPT         | 37090-009610 | 1    |
| 16       | L.P. Check point (part of control kit)        |              | 2    |
| 17       | BARAK PLASTIC BASE 2 GD-010(NPT)              | 70561-001500 | 4    |
| 18       | SUPPORT LEG 8"-150MM                          | 71910-001916 | 8    |
| 19       | SUPPORT LEG 10"-125MM                         | 71910-001927 | 2    |
| 20       | SUPPORT LEG 4"-1400MM                         | 71910-001952 | 2    |

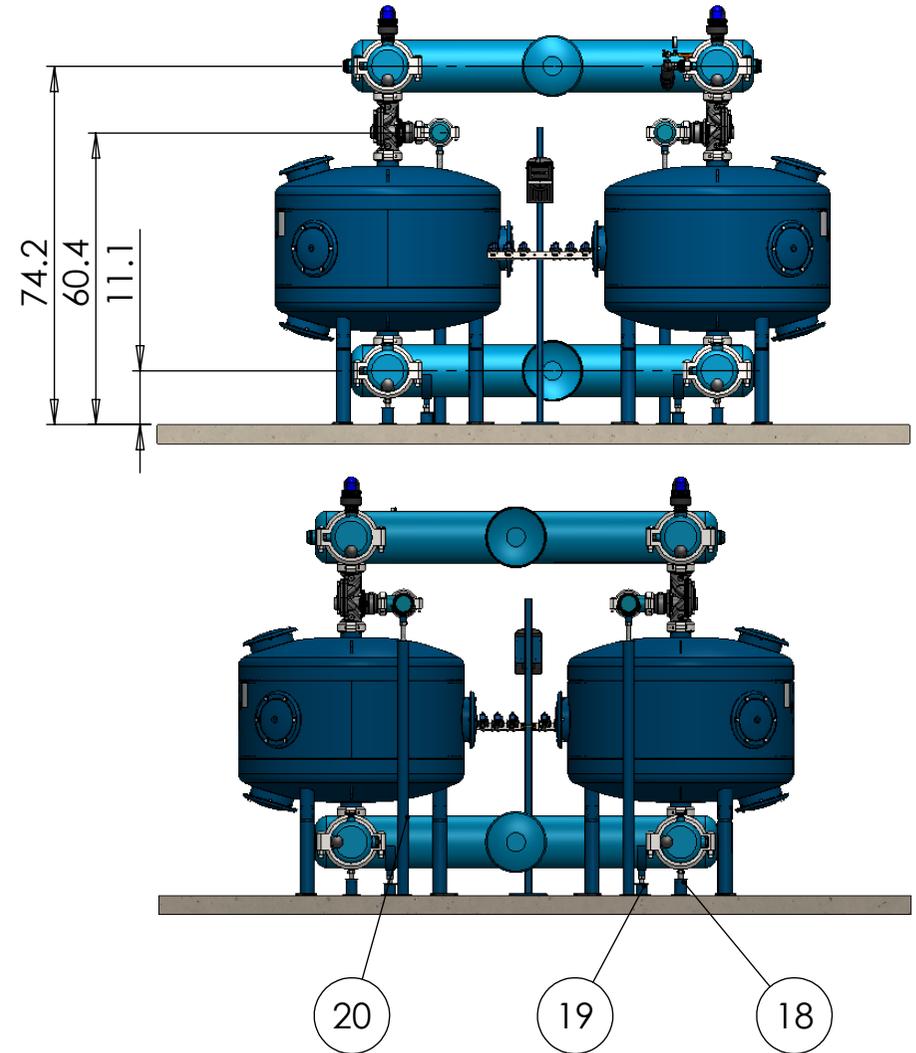

SAP DESCRIPTION:

MTL SNG 480612 H

SKU No.

Maximum Flow Rate: 2244 GPM

Recommended Flow Rate: 1848 GPM


Inlet Pressure: 115 PSI

Sheet Size:

A4

Scale:

1:40

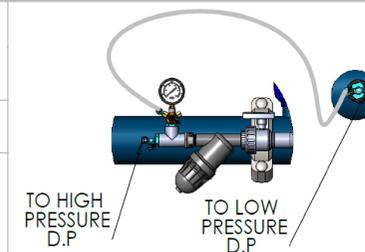

**NETAFIM™**

**PROPRIETARY AND CONFIDENTIAL**  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NETAFIM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NETAFIM IS PROHIBITED

Designed By

Drawn By KEREM 16/01/2020

Checked By

QA

Sheet: 3 Of: 3 Rev. -