

SAP DESCRIPTION:

MTL SNG 480712 H

SKU No.

Maximum Flow Rate: 2618 GPM

Recommended Flow Rate: 2156 GPM


Inlet Pressure: 115 PSI

Sheet Size:

A4


Scale:

1:45

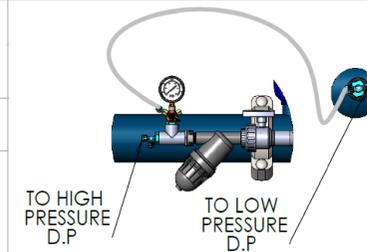

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NETAFIM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NETAFIM IS PROHIBITED

Designed By		
Drawn By	KEREM	16/01/2020
Checked By		
QA		
Sheet: 1	Of: 3	Rev. -

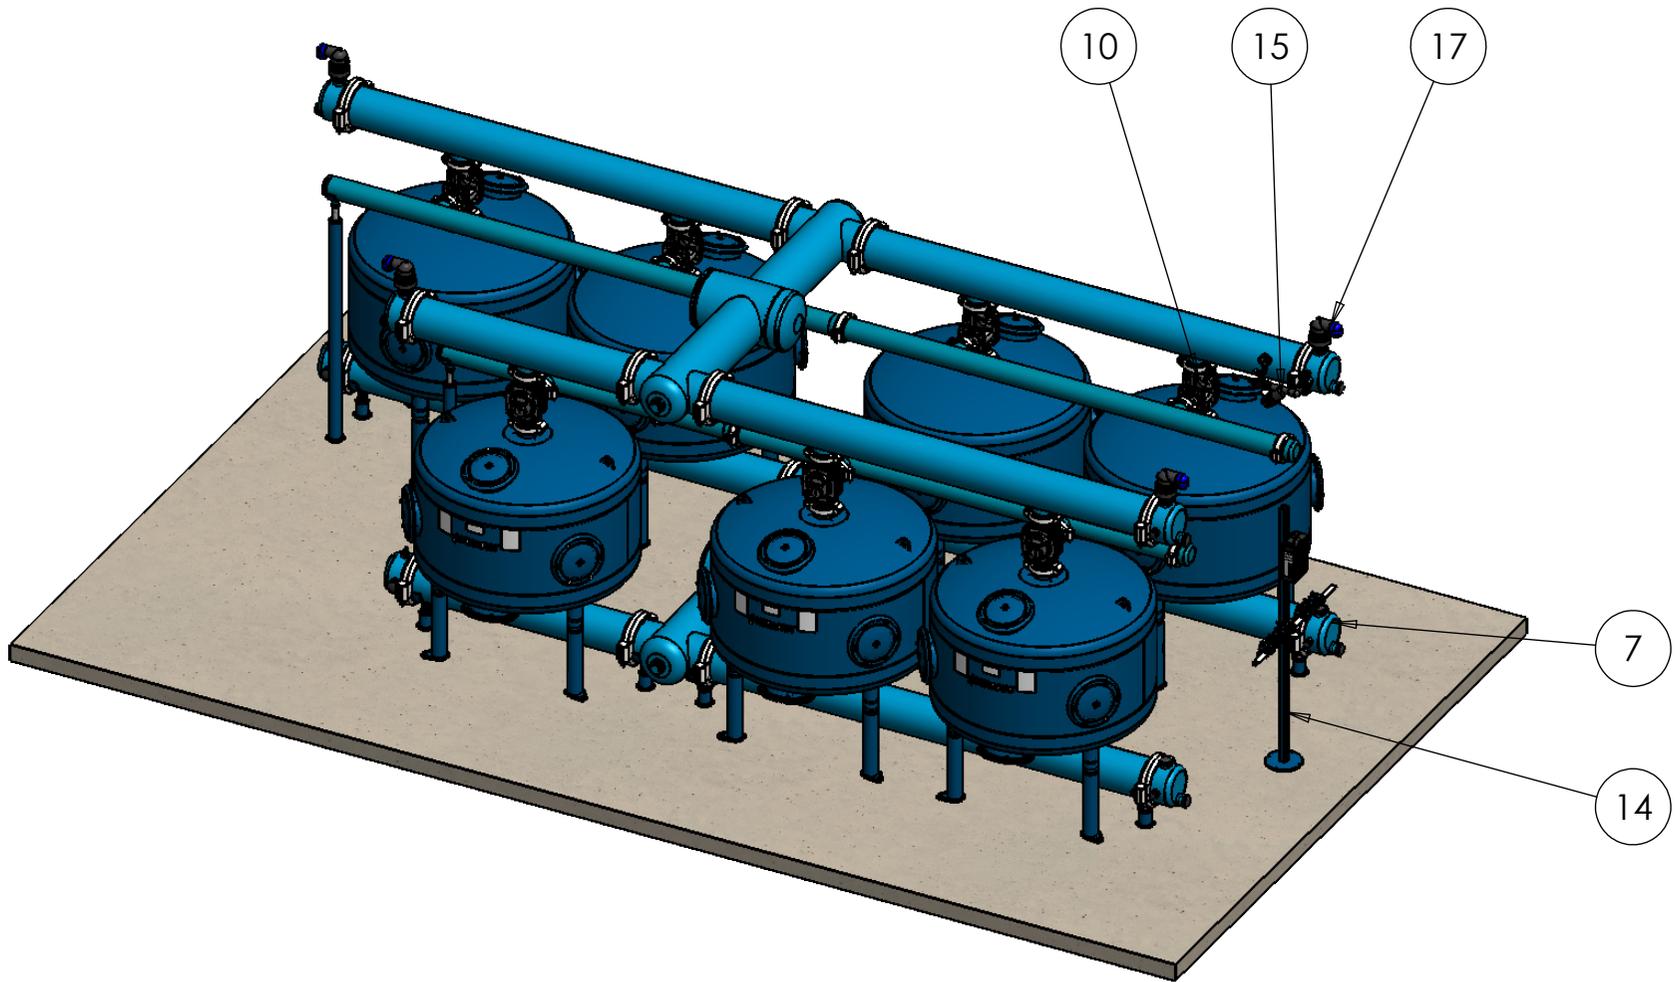

SAP DESCRIPTION:

MTL SNG 480712 H

SKU No.


Maximum Flow Rate: 2618 GPM

Recommended Flow Rate: 2156 GPM

Inlet Pressure: 115 PSI

Sheet Size:
A4


Scale:
1:40

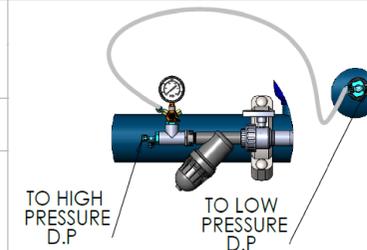

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NETAFIM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NETAFIM IS PROHIBITED

Designed By		
Drawn By	KEREM	16/01/2020
Checked By		
QA		
Sheet: 2	Of: 3	Rev. -

ITEM NO.	SAP Description	SAP Cat. No.	QTY.
1	METAL SNG.CHA.PLUS 48"*4" VIC PN08 LONG	71910-001626	7
2	METAL MAN H 12"VIC IN 4x8"VIC OUT+2"NPT	71910-002232	2
3	METAL MAN 8"*2 OUT*4" VIC F/48" TANK	71910-001713	6
4	METAL MAN 8"*1 OUT*4" VIC F/48" TANK	71910-001704	2
5	METAL BF MAN 4"*2 OUT*3" VIC F/48" TANK	71910-001712	3
6	METAL BF MAN 4"*1 OUT*3" VIC F/48" TANK	71910-001703	1
7	MET CUP 8"VIC W/2 OUT 2"NPT +1 OUT 1"NPT	71910-001804	8
8	METAL CUP 4" VIC	71910-001792	2
9	METAL NIPPLE VIC/VIC 4"*460MM	71910-009010	2
10	NET METAL B.F VALVE 4X3 STRAIGHT VIC	71600-006660	7
11	VICTAULIC COUPLING 3" ONE BOLT	71910-002501	7
12	VICTAULIC COUPLING 4" ONE BOLT	71910-002502	27
13	VICTAULIC COUPLING 8" TWO BOLT	71910-002504	16
14	Control stand + controller + Aquative bracket		1
15	1" CONTROL KIT FOR MEDIA FILTER - NPT	37090-009610	1
16	L.P. Check point (part of control kit)		2
17	BARAK PLASTIC BASE 2 GD-010(NPT)	70561-001500	4
18	SUPPORT LEG 8"-150MM	71910-001916	8
19	SUPPORT LEG 10"-125MM	71910-001927	2
20	SUPPORT LEG 4"-1400MM	71910-001952	2

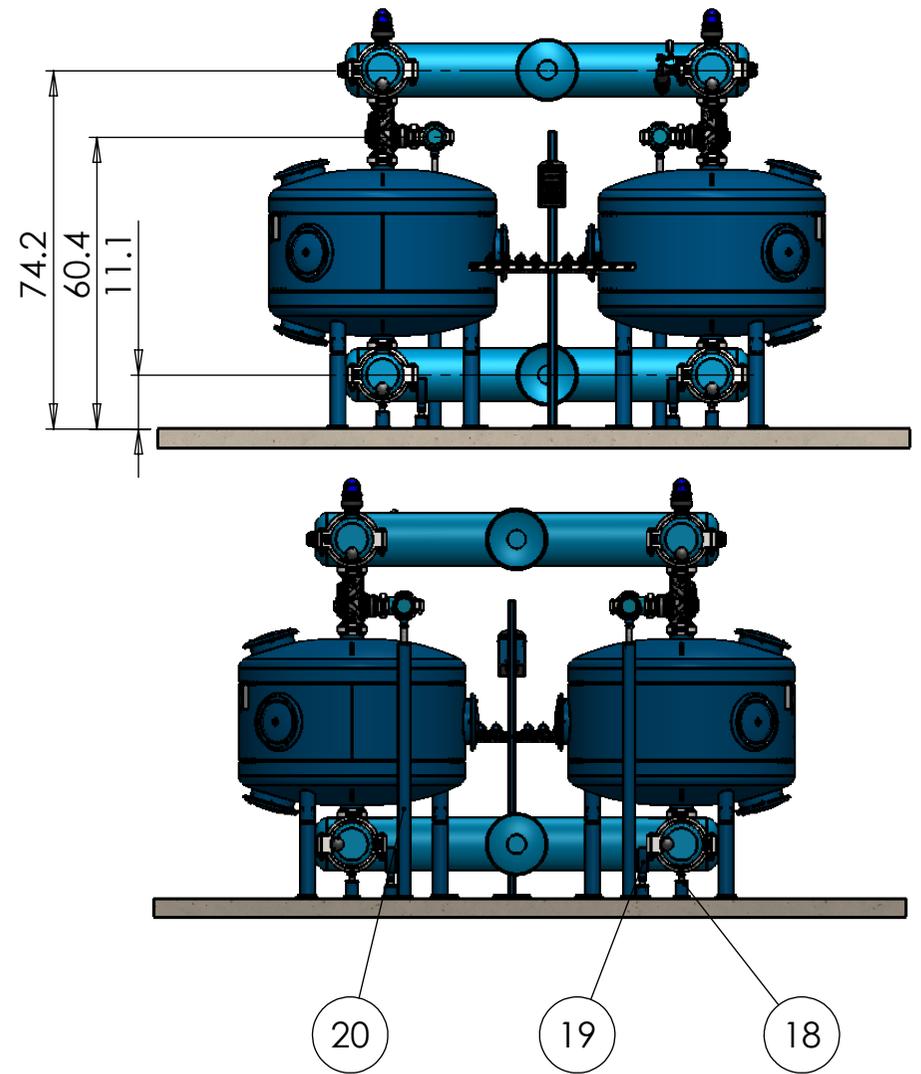

SAP DESCRIPTION:

MTL SNG 480712 H

SKU No.

Maximum Flow Rate: 2618 GPM

Recommended Flow Rate: 2156 GPM


Inlet Pressure: 115 PSI

Sheet Size:

A4

Scale:

1:40

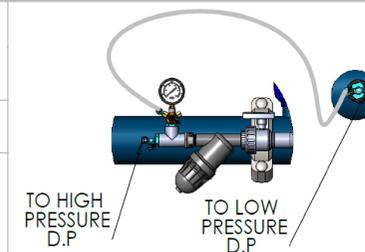

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF NETAFIM. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF NETAFIM IS PROHIBITED

Designed By

Drawn By

KEREM

16/01/2020

Checked By

QA

Sheet: 3

Of: 3

Rev. -